

FIG. 1

09191915-111398


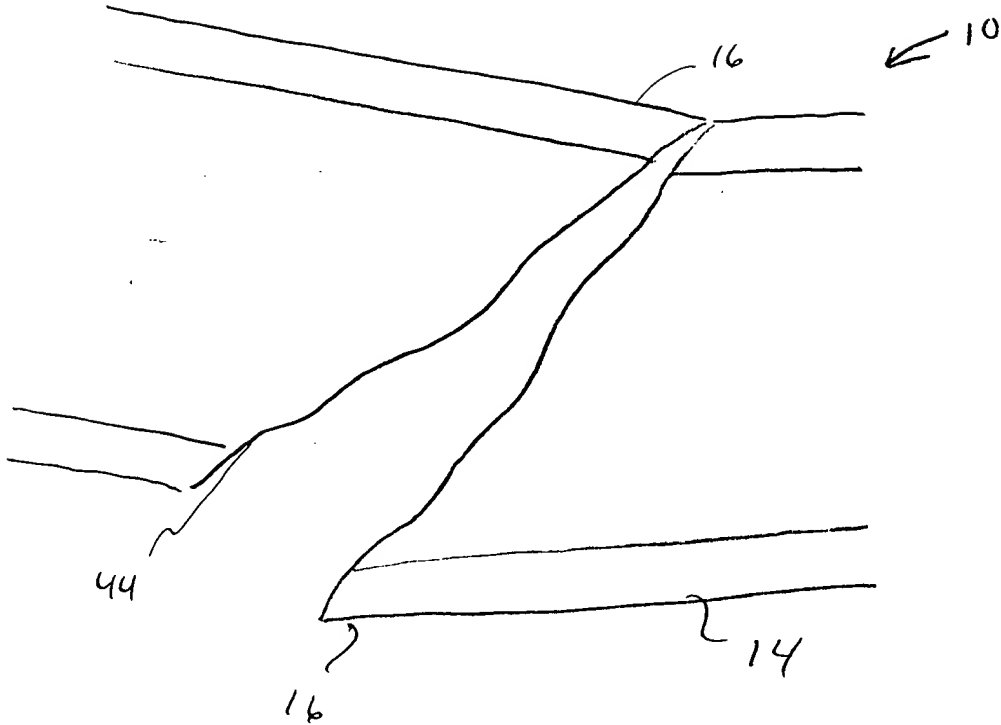


FIG. 2

09191915-111398

3/13

09191915-111398

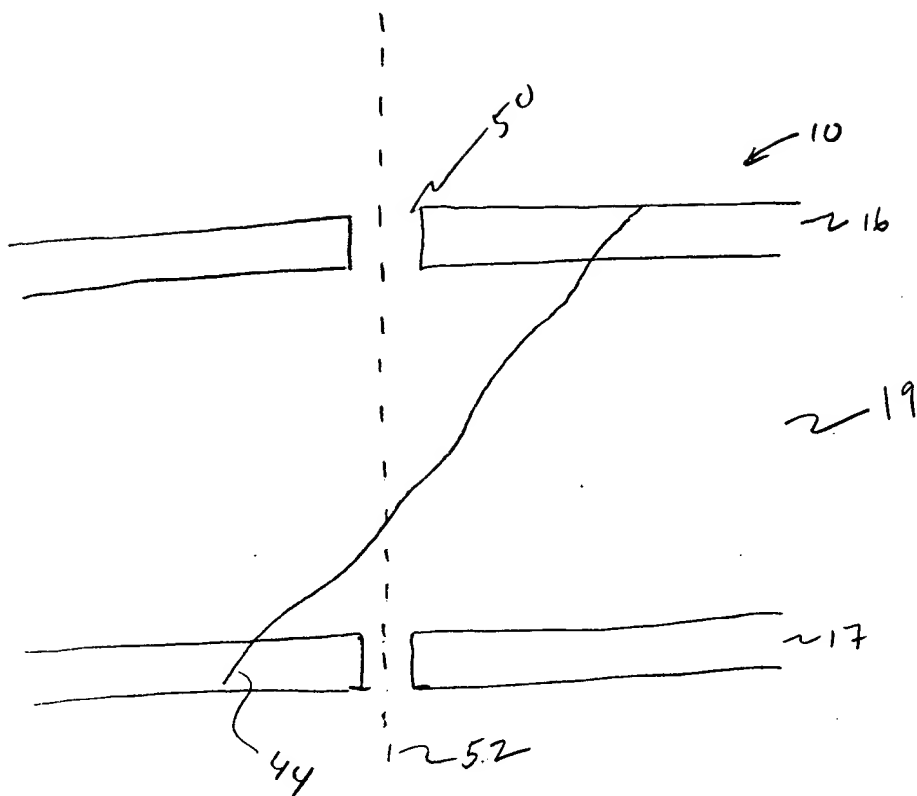

F7.6.3

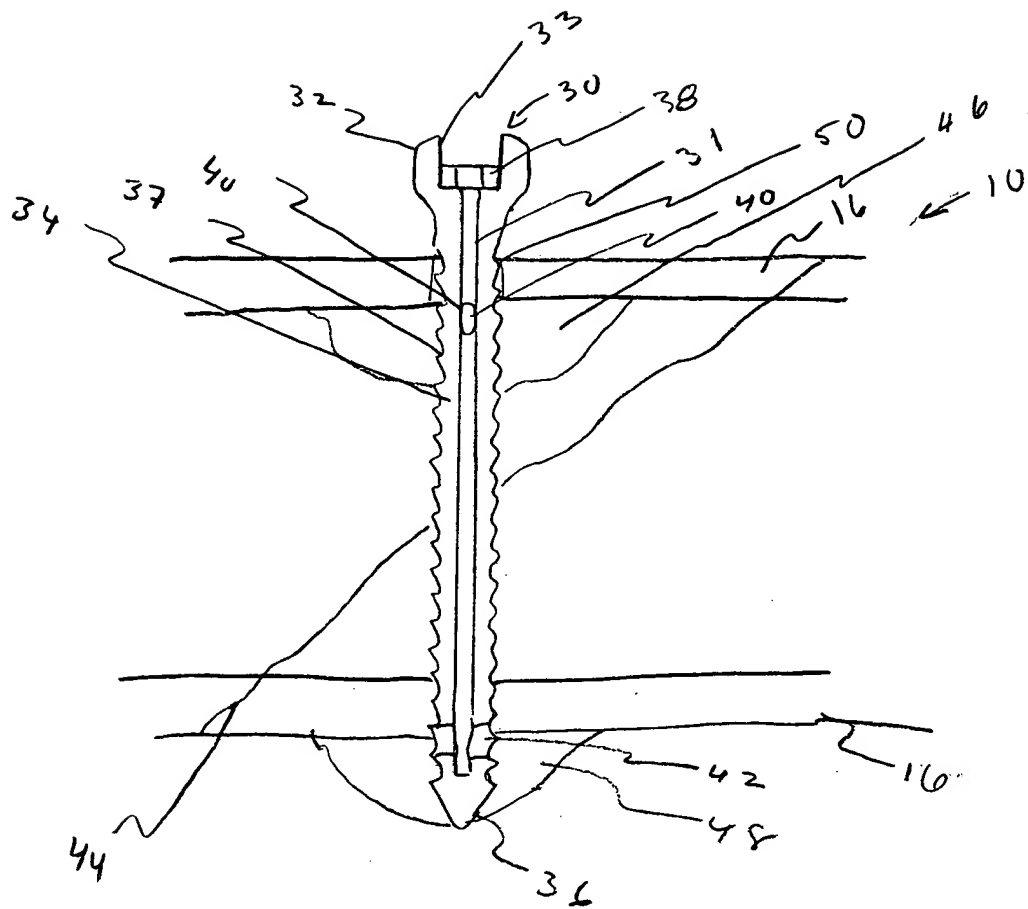


FIG. 4.




FIG. 58

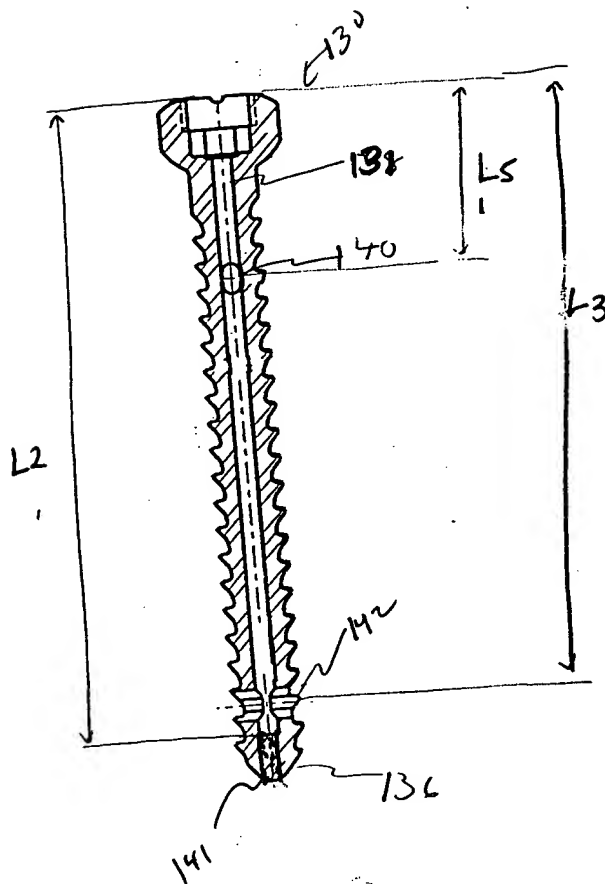
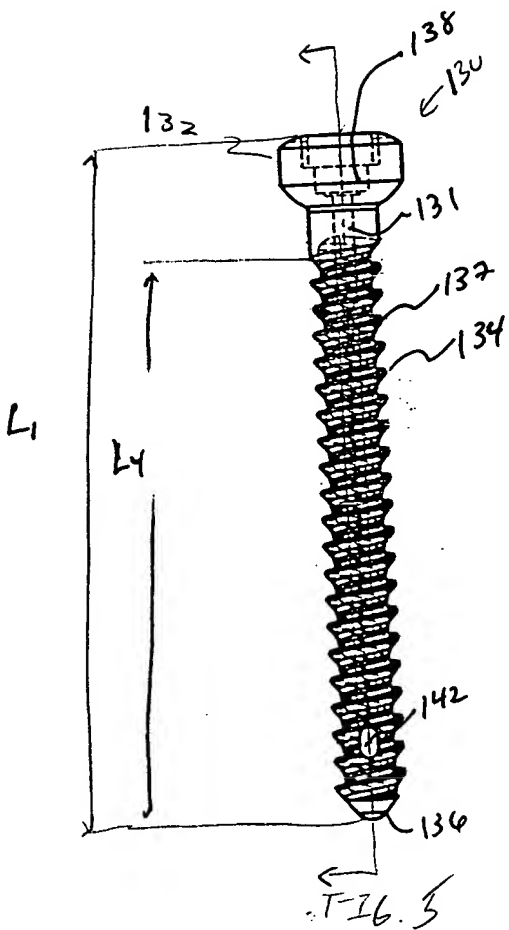


FIG. 5A




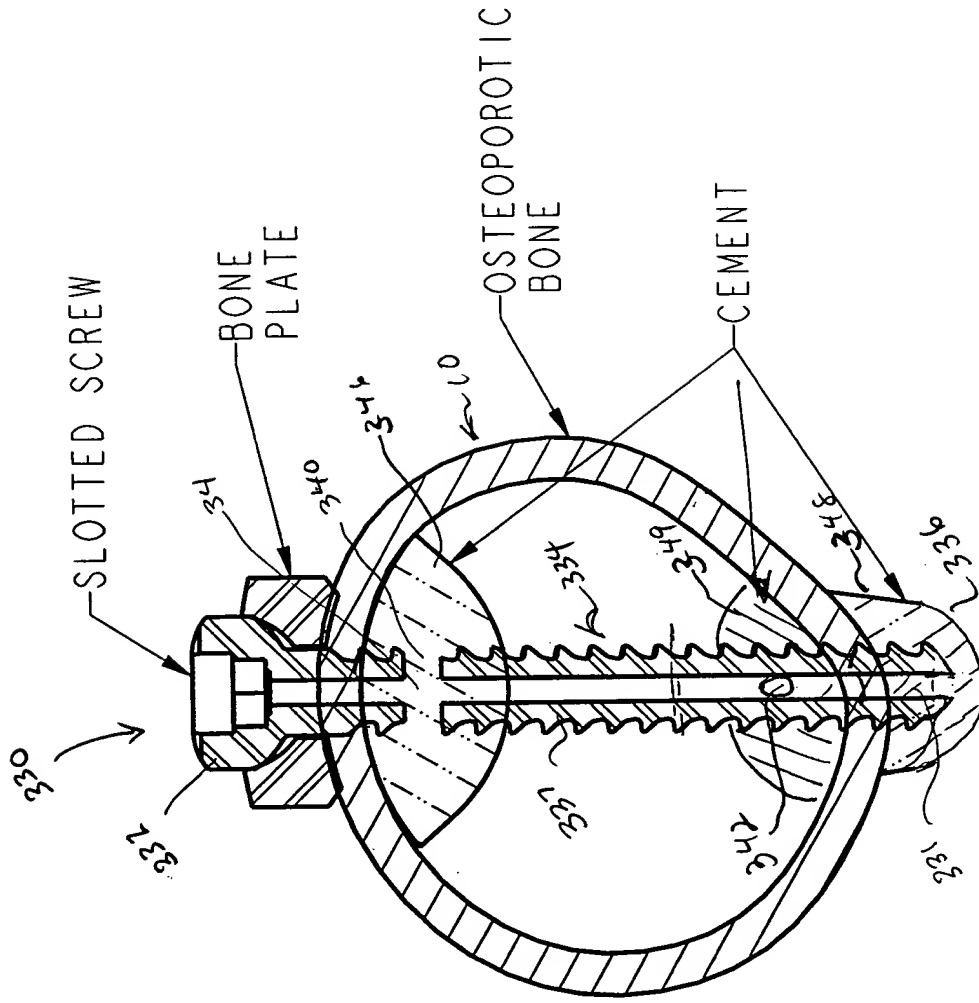


FIG 7

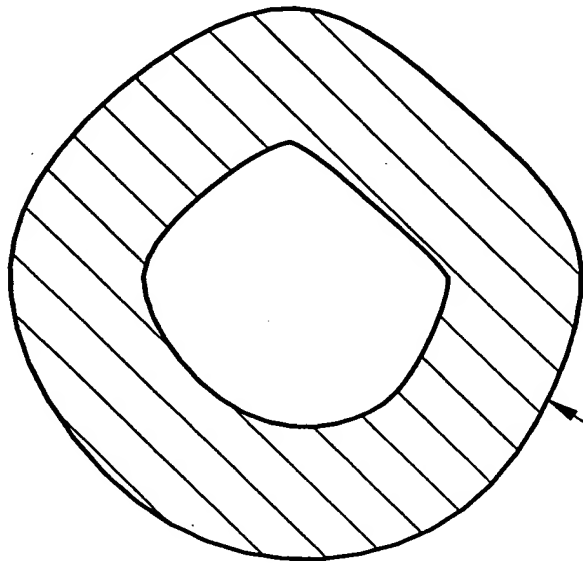

NORMAL BONE

*[Handwritten signature]*

8/13

Change  
from  
0



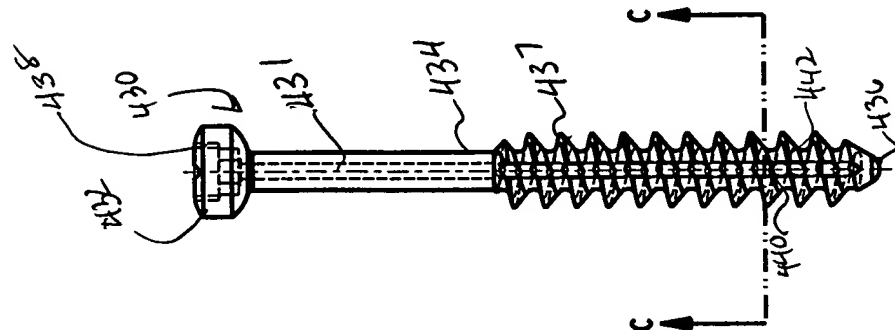



FIG 8

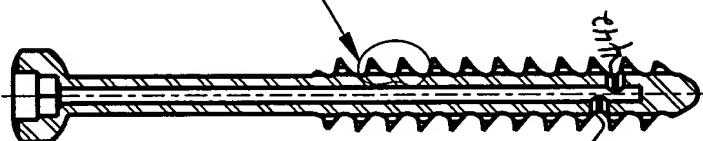


SEE DETAIL A

SECTION B-B

FIG 8A

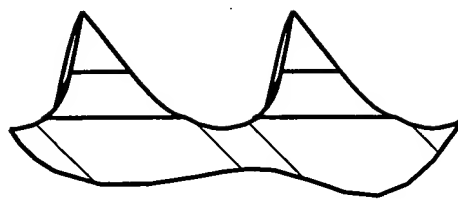

DETAIL A  
SCALE 10.000

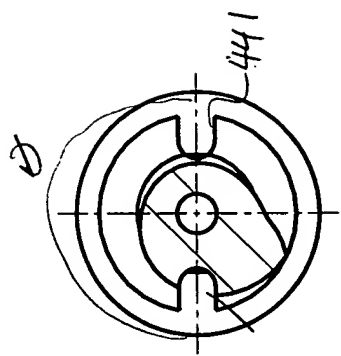

443


SECTION C-C  
SCALE 4.000

FIG 8B

Harrington Arthritis Research Center	
MATERIAL:	FINISH:
316 LS ASTM F-138 Stainless	Electropolish
TOLERANCE:	
.X ±0.3 .XX ±0.05 Angles X° ±2° Units: mm	
NAME: 6.5mm Slotted Cancellous Screw	
PART: C651 REV: 1	Sheet 1 of 1 Scale: 1:500




9/13

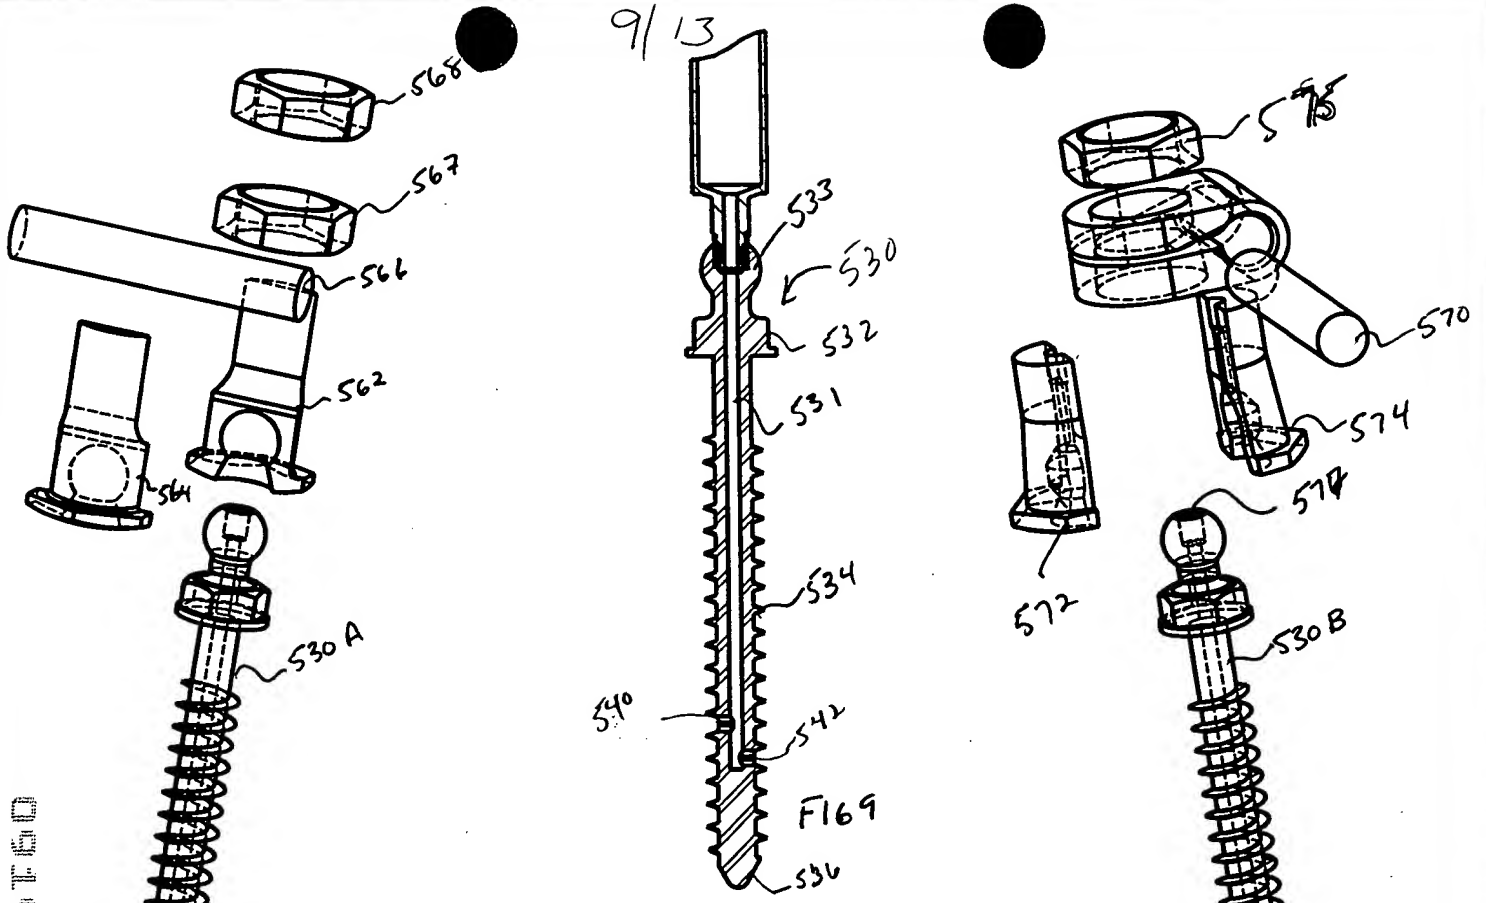

F1612



F1611

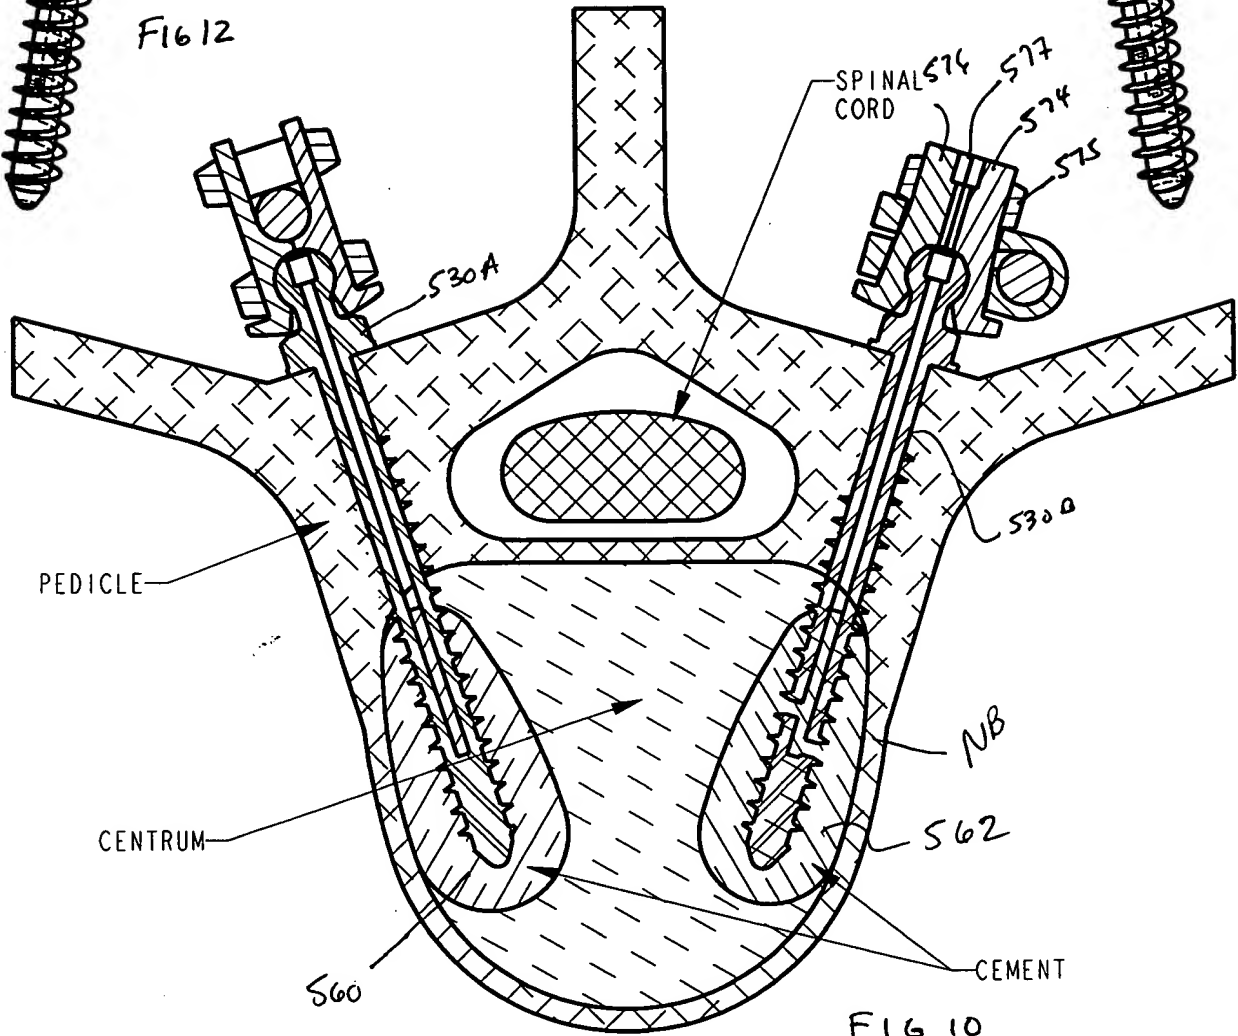

F1610



09191915-1139

# 366T<sup>TM</sup> SLOTTED

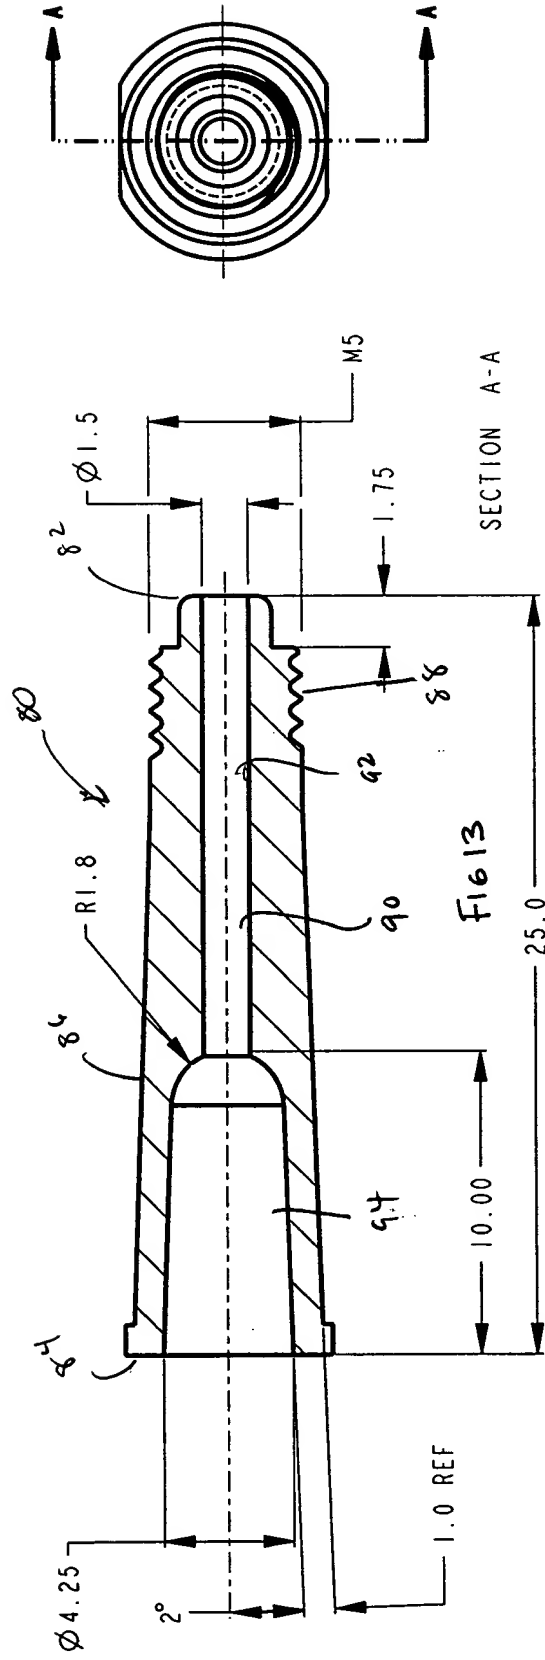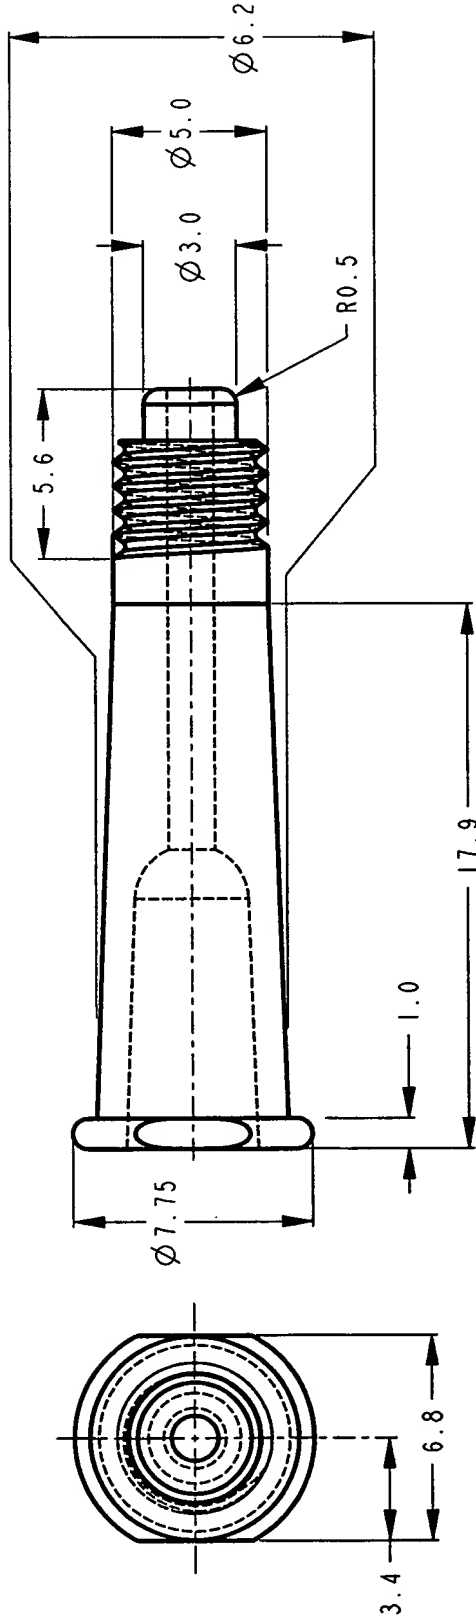

MATERIAL: --	FINISH: --	TOLERANCE: .X $\pm 0.3$ .XX $\pm 0.05$ Angles $X^\circ \pm 2^\circ$ Units: mm	Harrington Arthritis Research Center
			NAME: Slotted Screw Adaptor
			PART: AD01 REV: 1
			Sheet 1 of 1 Scale: 4.000



# 11/13 11/13

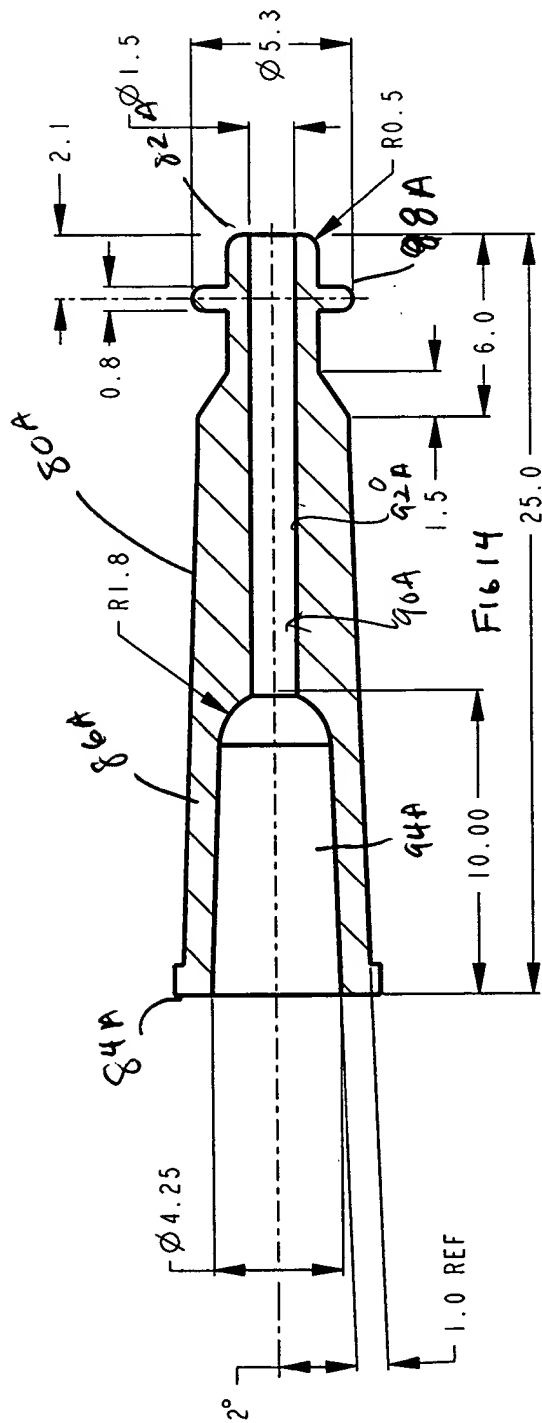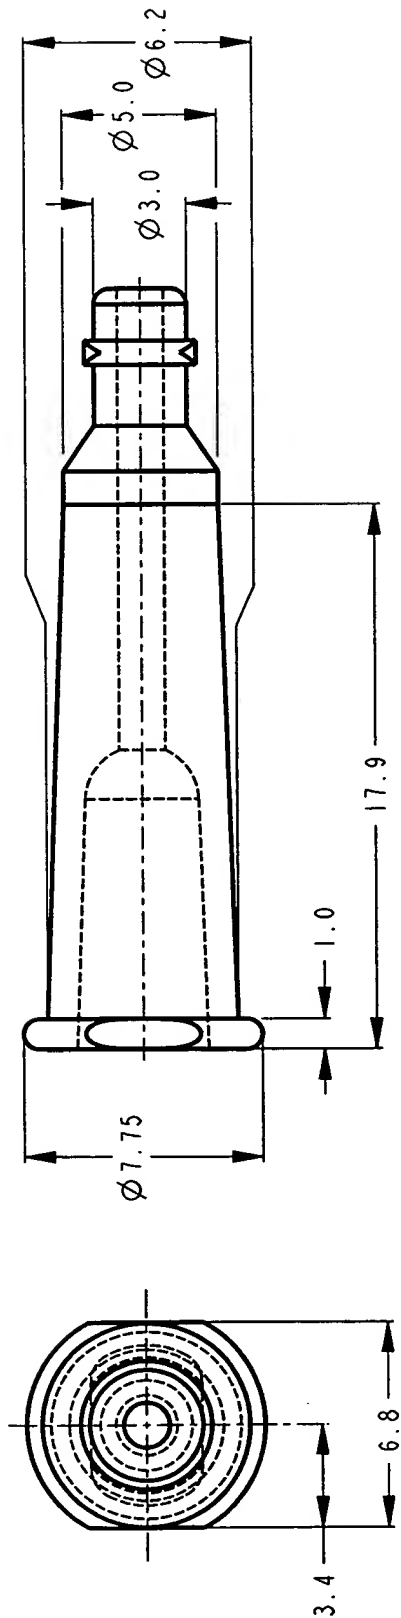

SECTION A-A

MATERIAL:	FINISH:	TOLERANCE:	Harrington Arthritis Research Center		
--	--	.X ±0.3 .XX ±0.05 Angles X° ±2° Units: mm	NAME: Slotted Screw Key Adaptor		
			PART: AD03 REV: 1		
			Sheet 1 of 1 Scale: 4.000		

12/13

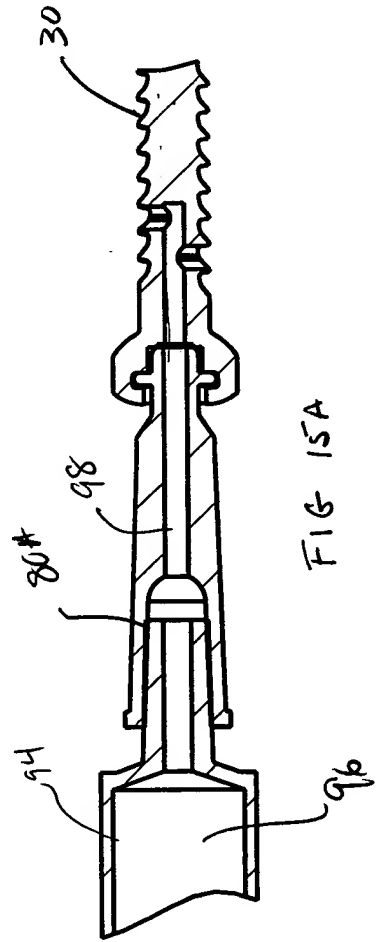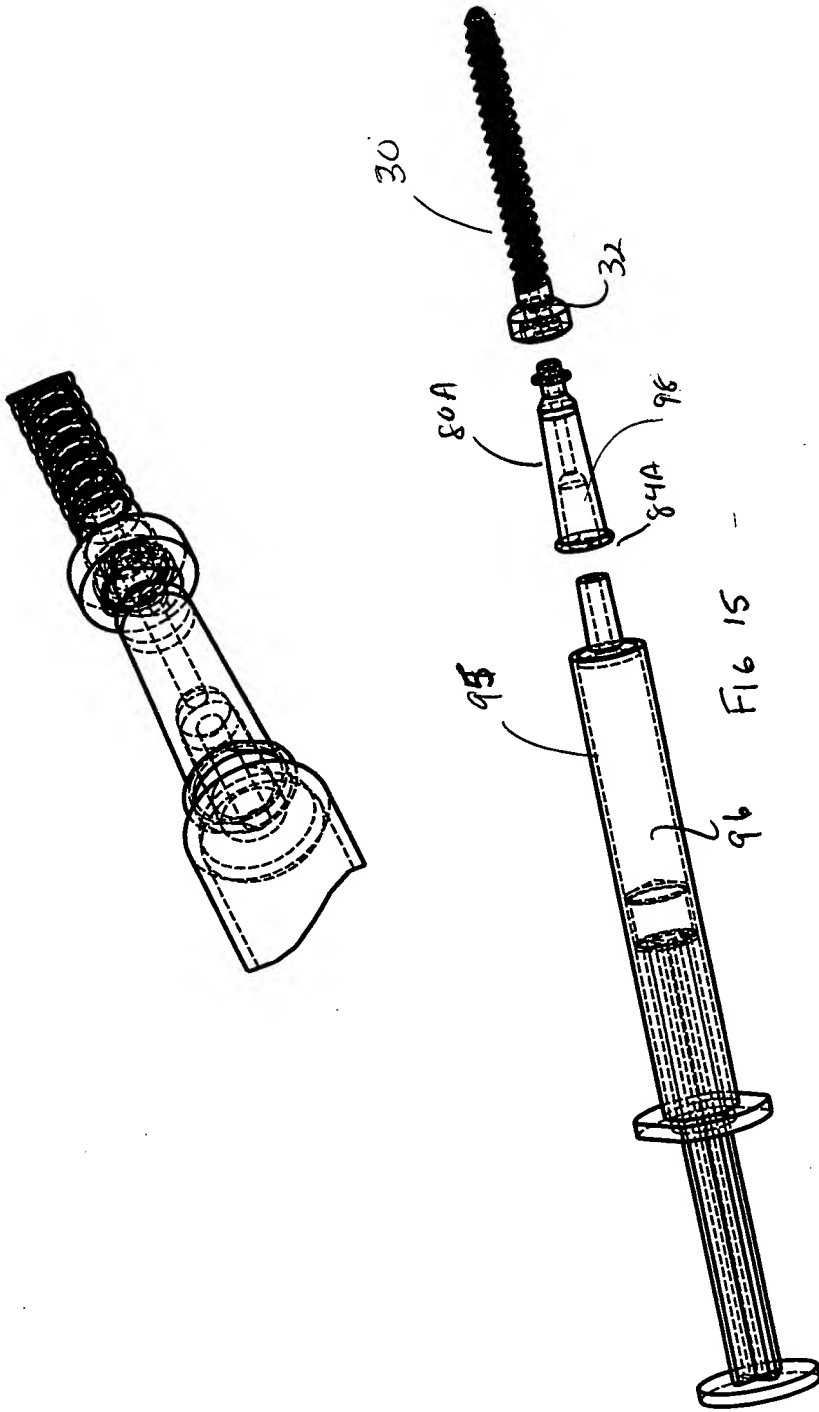

SECRET - STOP

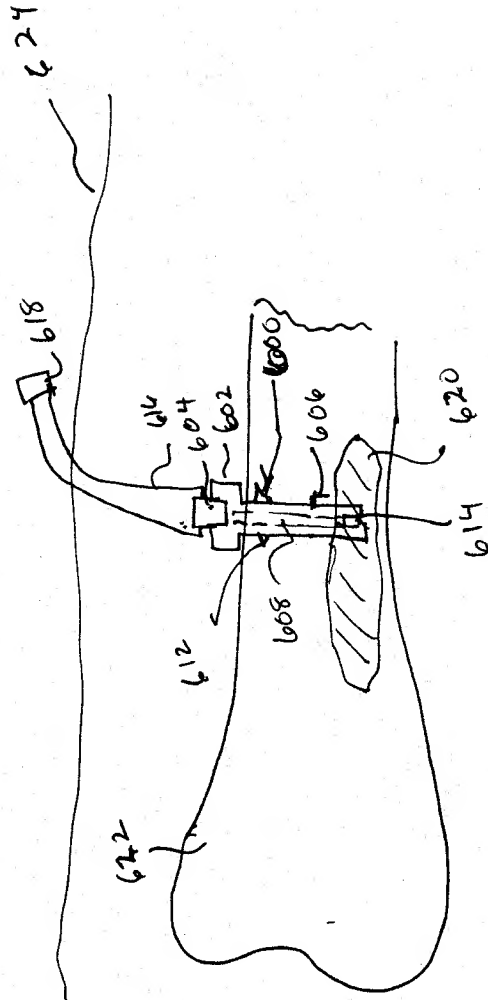


FIGURE 16